

4

3

2

1

1'-6.00"
(FILL POINT TO END WALL)
(CAN BE EITHER END OF DRYER)

3'-10.00"

2'-8.00"

3'-3.72"



33'-7.46"

41'-0.63"

30'-5.55"
(FILL HEIGHT)

14'-11.37"

9'-0.00"

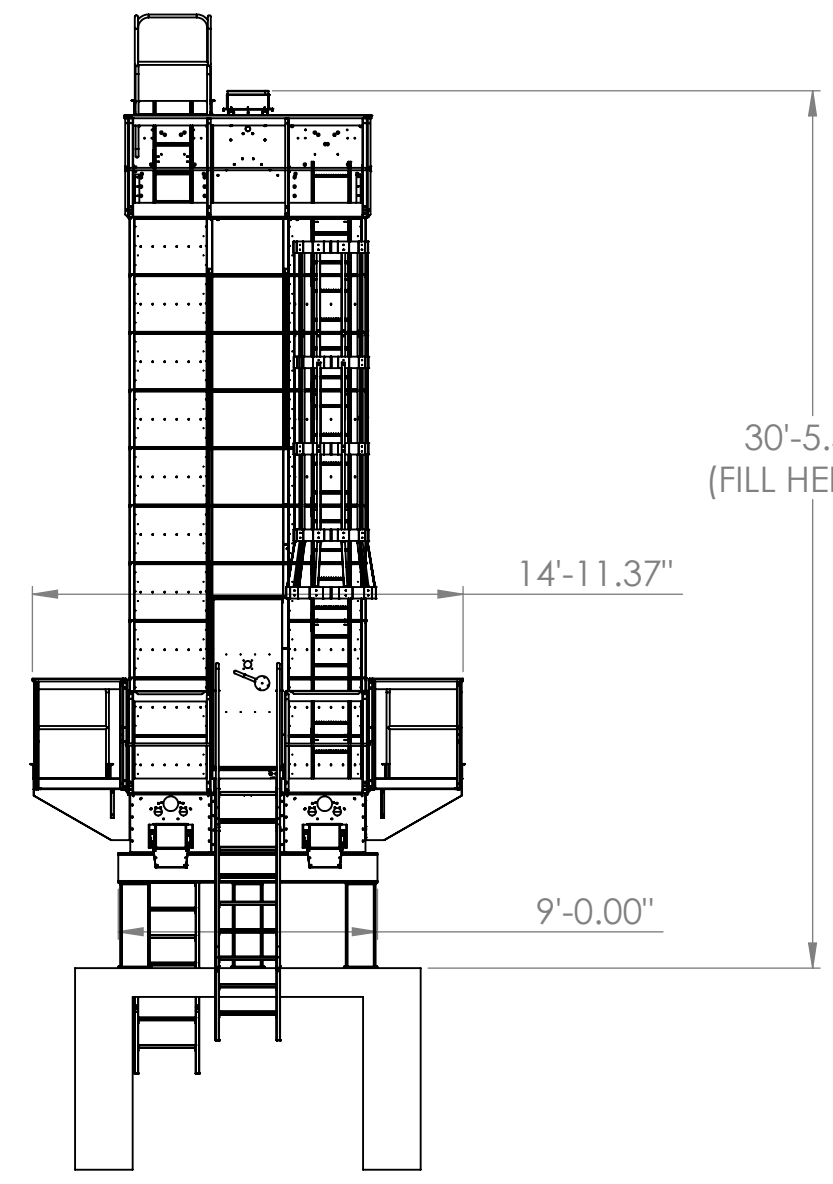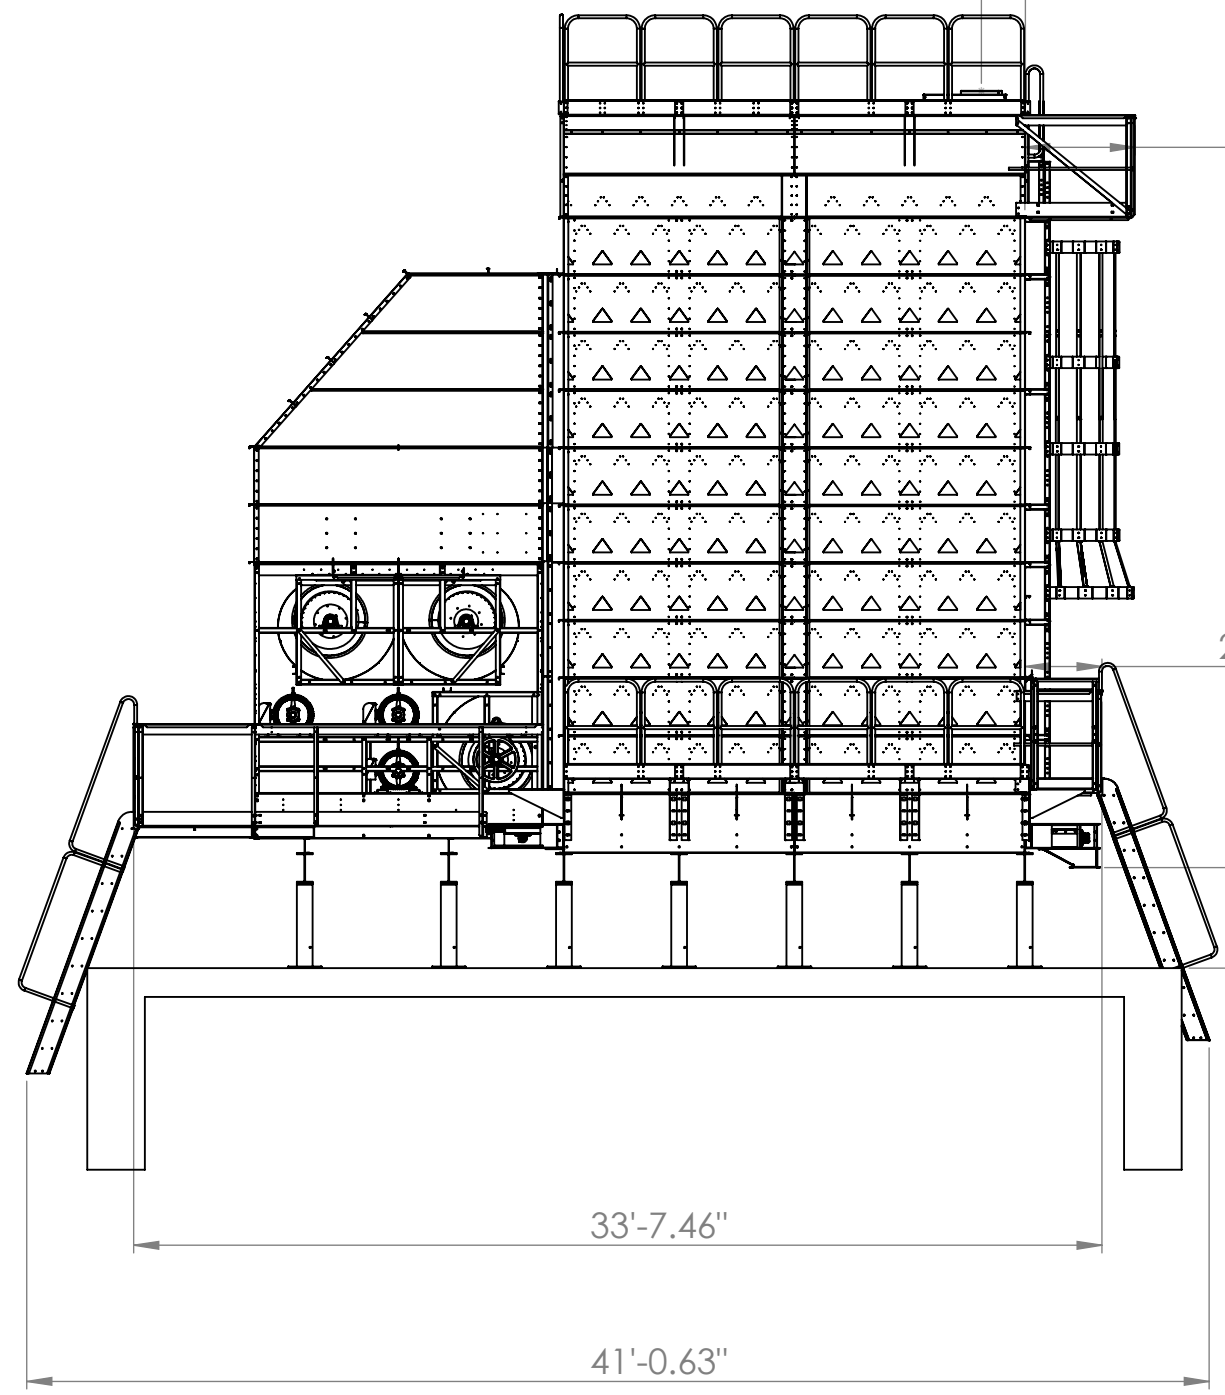

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:	NAME	DATE
		DIMENSIONS ARE IN INCHES	DRAWN	BJT
		TOLERANCES:	CHECKED	6-10-20
		FRACTIONAL: ±	ENG APPR.	
		ANGULAR: MACH ± BEND ±	MFG APPR.	
		TWO PLACE DECIMAL ±	Q.A.	
		THREE PLACE DECIMAL ±	COMMENTS:	
		INTERPRET GEOMETRIC TOLERANCING PER:		
		MATERIAL		
		FINISH		
NEXT ASSY	USED ON			
APPLICATION		DO NOT SCALE DRAWING		

Grain Handler		
TITLE:		
1610 CONVENTIONAL DRYER WITH LEVEL AUGER OPTION AND TUB CATWALK WITH 48" BEAMS		
SIZE	DWG. NO.	REV
B	1610 Conventional Dryer with Level Auger_48_BEAMS	
SCALE: 1:200		WEIGHT: SHEET 1 OF 1

4

3

2

1

B

B

A

A